








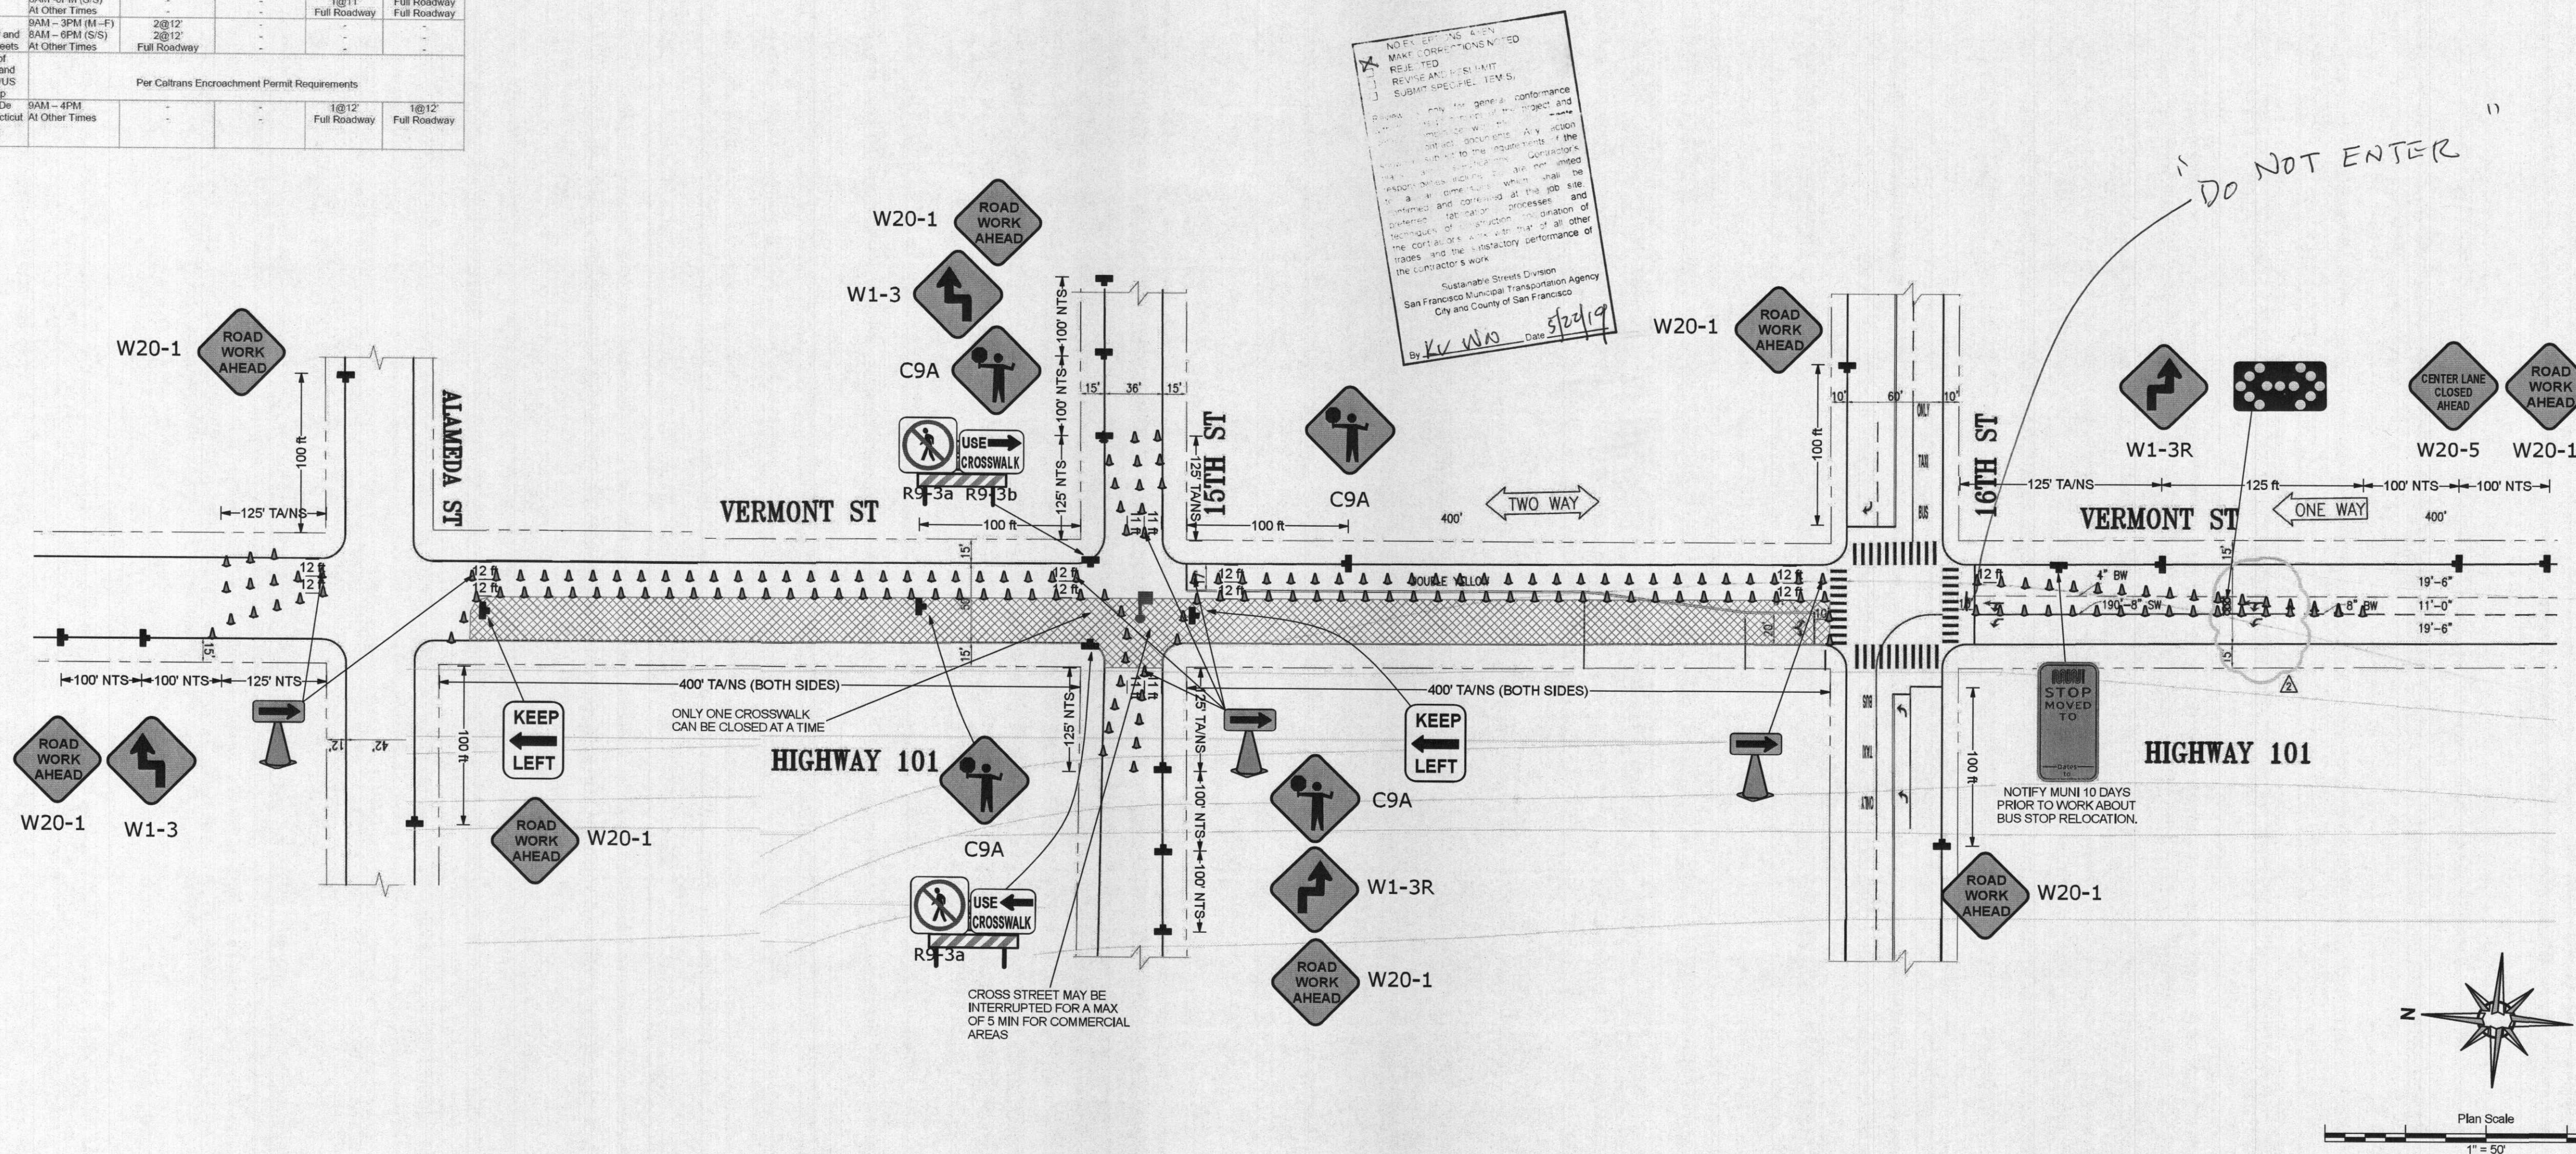


STREET	TIME	NORTHBOUND	SOUTHBOUND	EASTBOUND	WESTBOUND
<b><u>During Grinding and Paving Construction</u></b>					
Vermont St. south of Mariposa St. and between 13 <sup>th</sup> and Division Streets, Kansas, Henry Adam 6 Sits	8AM – 6PM At Other Times	1@12' Full Roadway	1@12' Full Roadway	-	-
Division Street at Vermont St.	8AM – 4PM (M – F) 8AM – 6PM (S/S) At Other Times	-	-	1@11' Full Roadway	Full Roadway
Vermont St., between 16 <sup>th</sup> and Mariposa Streets	8AM – 3PM (M – F) 8AM – 6PM (S/S) At Other Times	2@12' Full Roadway	-	-	-
Intersection of Vermont St and Mariposa St./US 101 Off-Ramp	8AM – 4PM At Other Times	-	-	1@12' Full Roadway	1@12' Full Roadway
Per Caltrans Encroachment Permit Requirements					
16 <sup>th</sup> St. ** at De Haro, Connecticut and Vermont Sts. ***	8AM – 4PM At Other Times	-	-	1@12' Full Roadway	1@12' Full Roadway

**TRAFFIC CONTROL PLAN**  
**2792J VARIOUS LOCATIONS #37**  
**GRIND & PAVE - VERMONT ST FROM ALAMEDA ST TO 16TH ST**

[www.invarion.com](http://www.invarion.com)



- ### Legend
- |   |                                 |
|---|---------------------------------|
|  | Channelizer                     |
|  | 28" Traffic Cone                |
|  | Work Area                       |
|  | Sign and Stand                  |
|  | Type III Barricade (Plain View) |
|  | ADA Pedestrian Barricade        |
| NTS   | Not To Scale                    |
| T/A/N/S   | Tow-Away/No Stopping            |
|  | Crash Cushion                   |
|  | Flagger                         |
|  | Water Filled Barrier            |



3450 3RD ST #3G  
SAN FRANCISCO, CA 94124  
415-206-1700 PHONE  
415-206-1711 FAX  
INFO@CMCTRAFFIC.COM

LICENSE NO 792059  
CLASS A, 31, C21

WBE/SBE/LBE/DBE CERTIFIED  
WWW.CMCTRAFFIC.COM

**Date:** 5/7/2019 **Author:** KR/DD **Project:** 2792J  
**CLIENT:** PRECISION **Owner:** SFDPW **Location:** SAN FRANCISCO  
**TCP:** 070 **CMC Job #:** 1812 **REV:** 1

**Comments:**

- 1) WORK HOURS: 9AM - 4PM (M-F)
- 2) CONTRACTOR TO VERIFY EXISTING STRIPING IS ACCURATE PRIOR TO START OF WORK.
- 3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.
- 4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.
- 5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK, WITHOUT EXCEPTION.
- 6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5) MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT ANY DELAY.
- 7) San Francisco Fire Dept. Engine Co. Number 23 is located at the northeast corner of 16th and Vermont Streets. 5 working days before starting any construction work on Vermont Street which will affect the ingress and egress of the fire engine into and out of this fire house, Contractor shall contact any officer of this fire house, Telephone No. (415) 558-3229, to arrange with the officer to park their fire engine on 16th Street in front of the fire house during Contractor's working hours.