



STREET	TIME	NORTHBOUND	SOUTHBOUND	EASTBOUND	WESTBOUND
During Grinding and Paving Construction					
Vermont St. south of Mariposa St. and between 15th and Division Streets, Kansas, Henry Adam B Sts.	8AM - 6PM At Other Times	1@12' Full Roadway	1@12' Full Roadway	-	-
Division Street at Vermont St.	8AM - 4PM (M-F) 8AM - 6PM (S/S) At Other Times	-	-	1@11' 1@11' Full Roadway	Full Roadway Full Roadway
Vermont St. between 16th and Mariposa Streets	8AM - 3PM (M-F) 8AM - 6PM (S/S) At Other Times	-	2@12' Full Roadway	-	-
Intersection of Vermont St. and Mariposa St./US 101 Off-Ramp	Per Caltrans Encroachment Permit Requirements	-	-	-	-
16th St. at De Haro, Connecticut and Vermont Sts.***	9AM - 4PM At Other Times	-	-	1@12' Full Roadway	1@12' Full Roadway

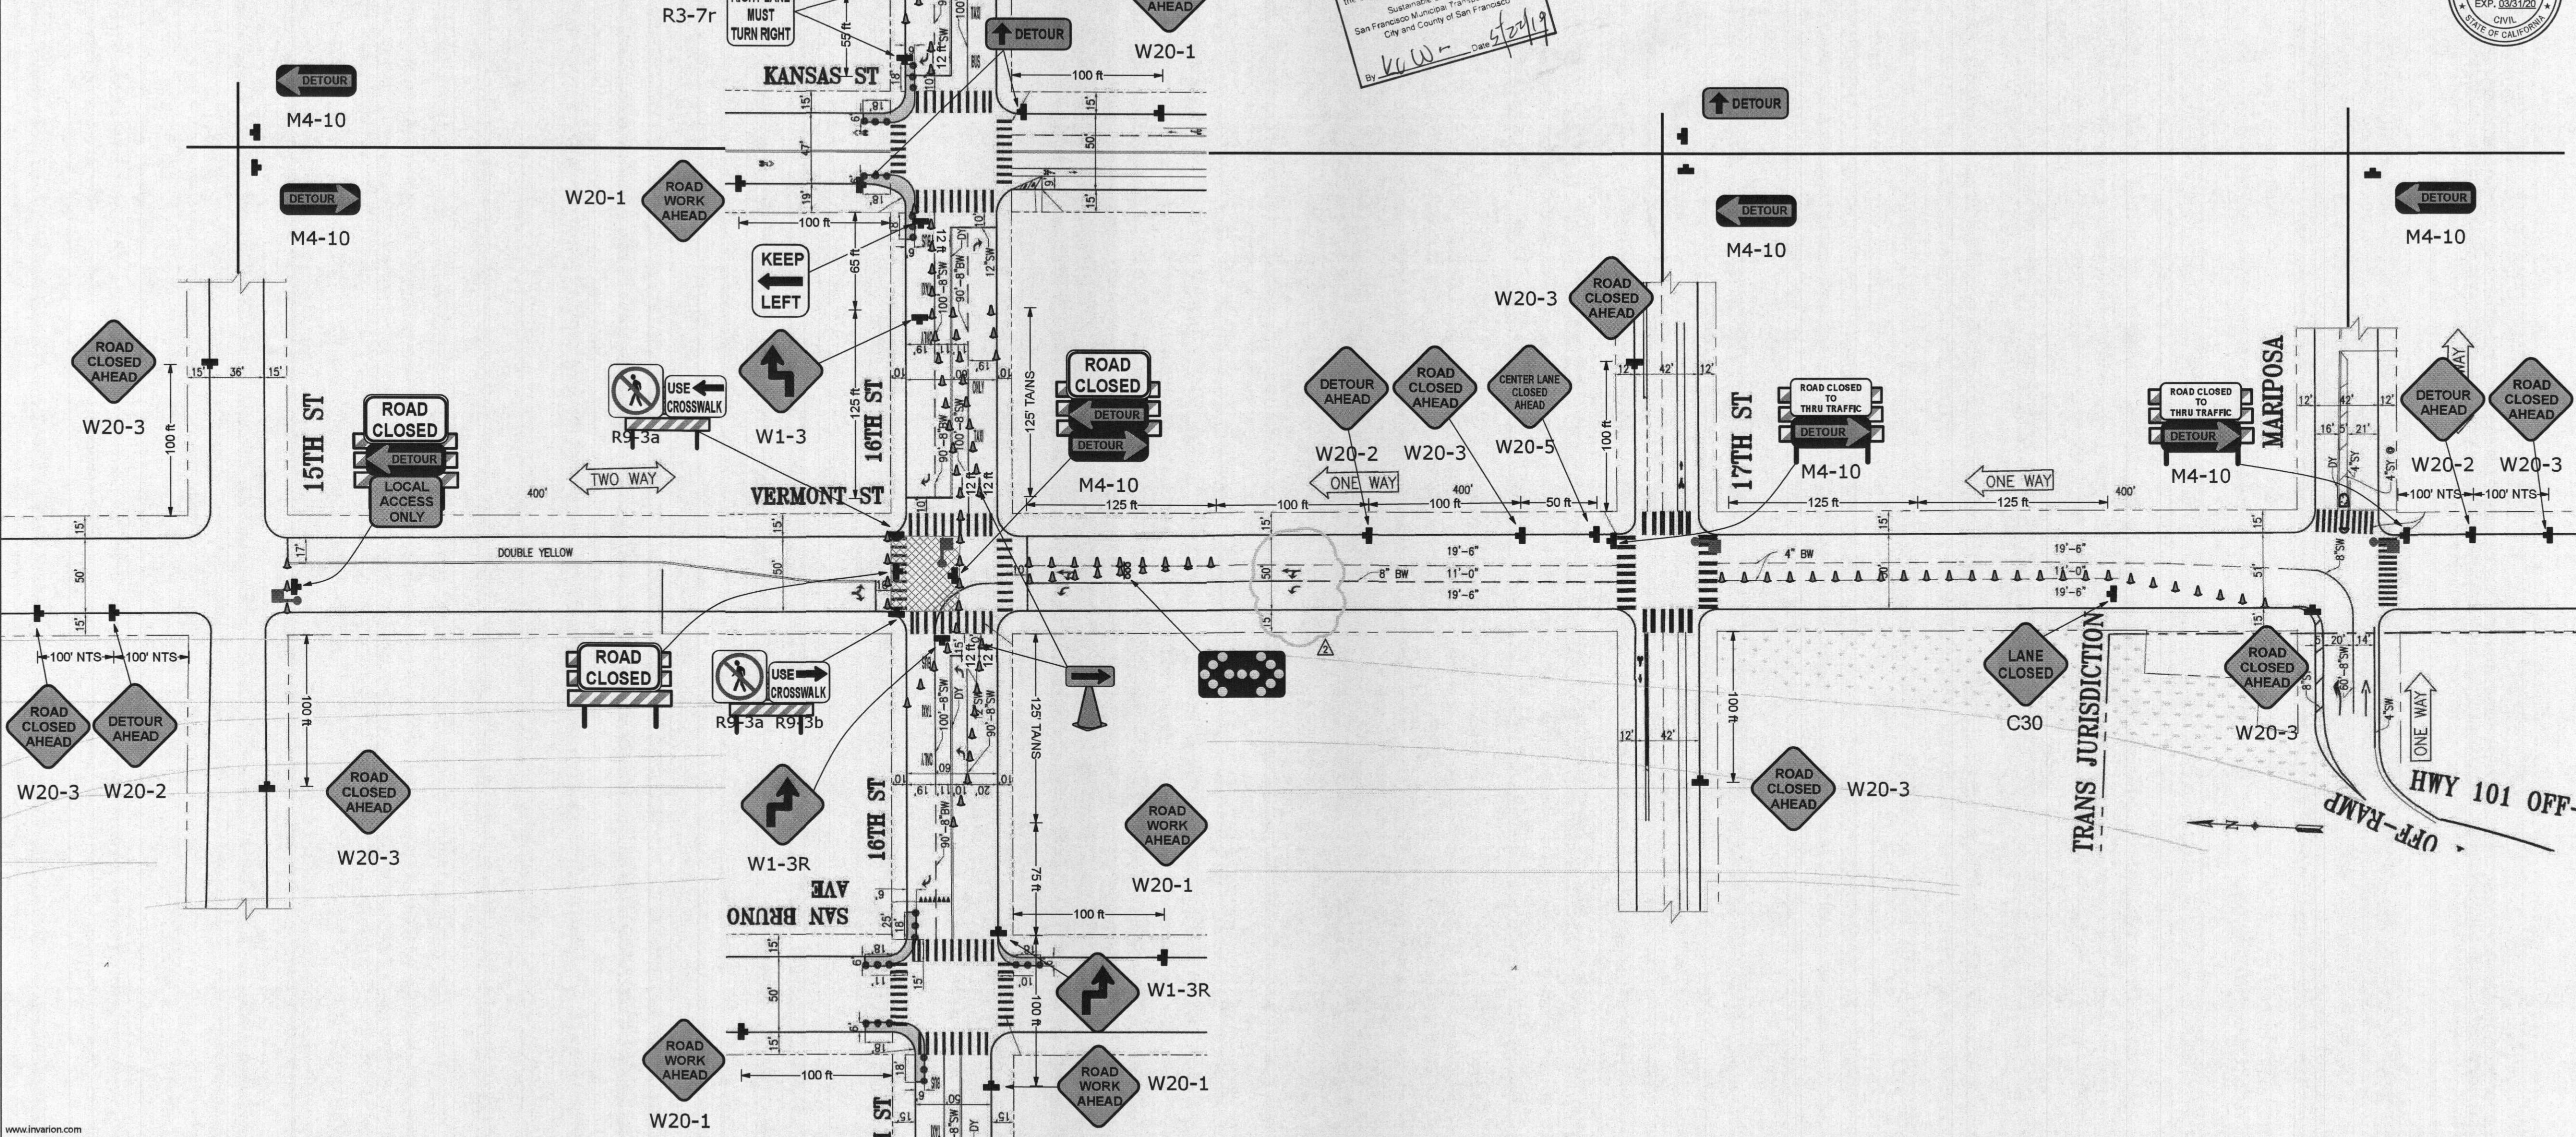

TRAFFIC CONTROL PLAN  
2792J VARIOUS LOCATIONS #37  
GRIND & PAVE - VERMONT ST AT 16TH ST

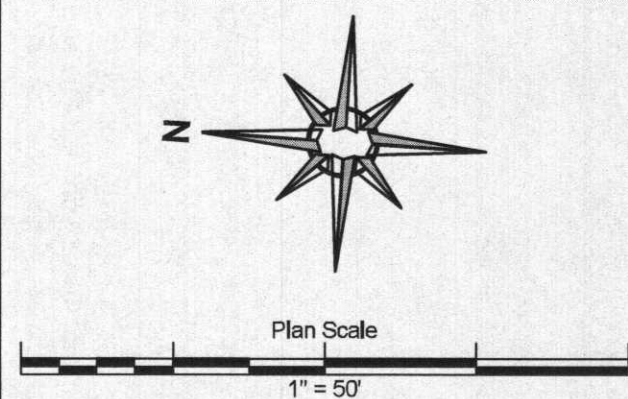

3450 3RD ST #3G  
SAN FRANCISCO, CA 94124  
415-206-1700 PHONE  
415-206-1711 FAX  
INFO@CMCTRAFFIC.COM

LICENSE NO 792059  
CLASS A, 31, C21  
WBE/SBE/LBE/DBE CERTIFIED  
WWW.CMCTRAFFIC.COM

NO EXCEPTIONS TAKEN  
MAKE CORRECTIONS NOTED  
REJECTED  
REVISE AND RE-SUBMIT  
SUBMIT SPECIFIED ITEMS

Review of plan for general conformance with the requirements of the project and the requirements of the contract documents. Any action shown is subject to the requirements of the project and the requirements of the contract documents. Contractors shall be responsible for all work shown on the plan and shall be responsible for all work shown on the plan and shall be responsible for all work shown on the plan.

Sustainable Streets Division  
San Francisco Municipal Transportation Agency  
City and County of San Francisco

By *KC W* Date *6/24/19*

Date: 5/7/2019 Author: KR/DD Project: 2792J  
CLIENT: PRECISION Owner: SFPDPW Location: SAN FRANCISCO  
TCP: 092 CMC Job #: 1812 REV: 1

- Comments:
- 1) WORK HOURS: 9AM - 4PM (M-F)
  - 2) CONTRACTOR TO VERIFY EXISTING STRIPING IS ACCURATE PRIOR TO START OF WORK.
  - 3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.
  - 4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.
  - 5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK, WITHOUT EXCEPTION.
  - 6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5) MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT ANY DELAY.
  - 7) San Francisco Fire Dept. Engine Co. Number 29 is located at the northeast corner of 16th and Vermont Streets. 5 working days before starting any construction work on Vermont Street which will affect the ingress and egress of the fire engine into and out of this fire house, Contractor shall contact any officer of this fire house, Telephone No. (415) 558-3229, to arrange with the officer to park their fire engine on 16th Street in front of the fire house during Contractor's working hours.

