STREET NORTHBOUND SOUTHBOUND EASTBOUND WESTBOUND **During Grinding and Paving Construction**

Road Closed To Road Closed To

Through Traffic Through Traffic

Full Roadway Full Roadway

20TH ST

M4-10 🛖

M4-10


15th St. west of 8AM - 6PM


Alameda, 20th St., At Other Times

Potrero Ave.

18th St. between

TRAFFIC CONTROL PLAN 2792J VARIOUS LOCATIONS #37 GRIND & PAVE - 18TH ST FROM DE HARO ST TO CAROLINA ST

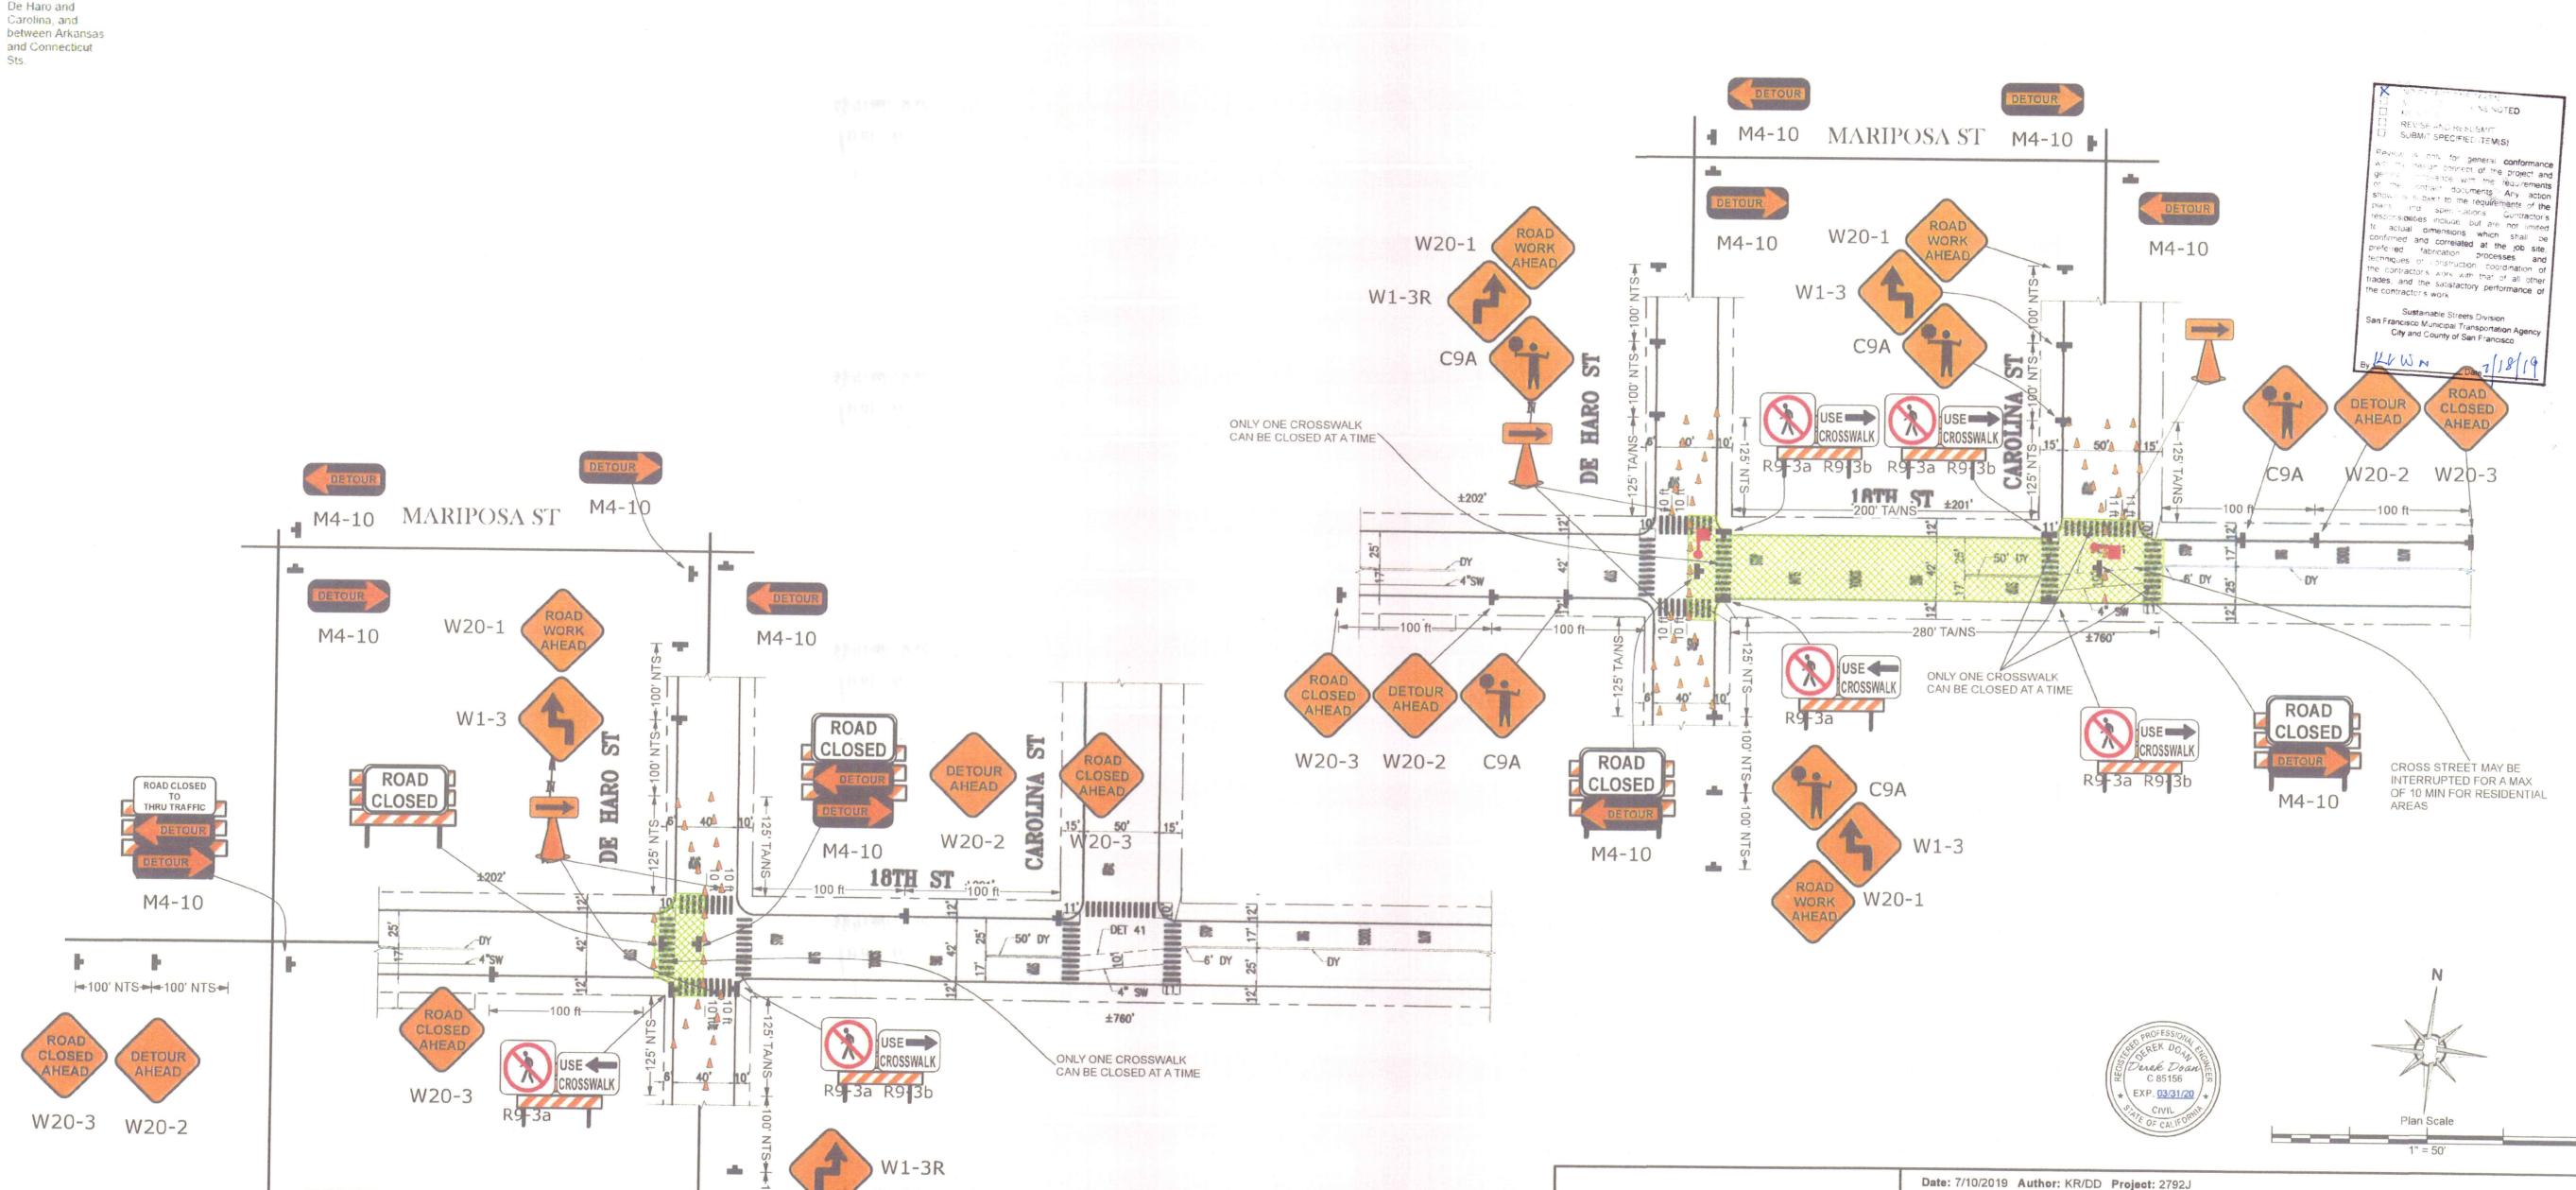

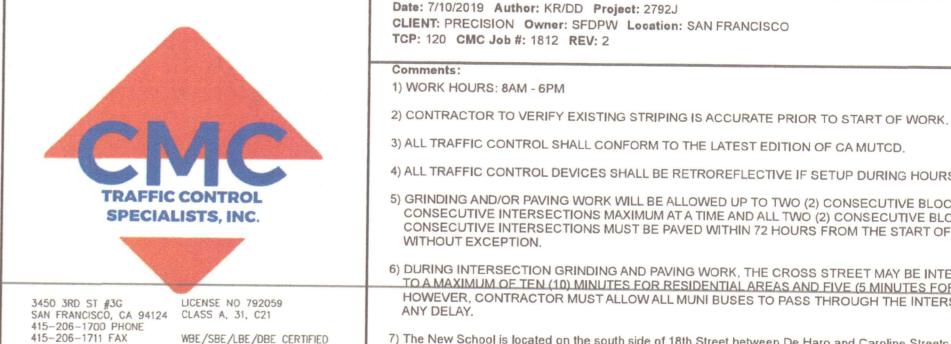

INFO@CMCTRAFFIC.COM

WBE/SBE/LBE/DBE CERTIFIED

WWW.CMCTRAFFIC.COM

3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.

WITHOUT EXCEPTION.

4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.

5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2)

CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK,

6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5 MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT

7) The New School is located on the south side of 18th Street between De Haro and Caroline Streets. 10 working days before starting any construction work in front of the school which may affect the loading and unloading of students on 18th Street, Contractor shall contact and work with Megan Hugel Telephone No. (415) 695-571 of this school and arrange an alternated loading zone on the east side of De Haro Street south of 18th Street.

W20-1

www.invarion.com