
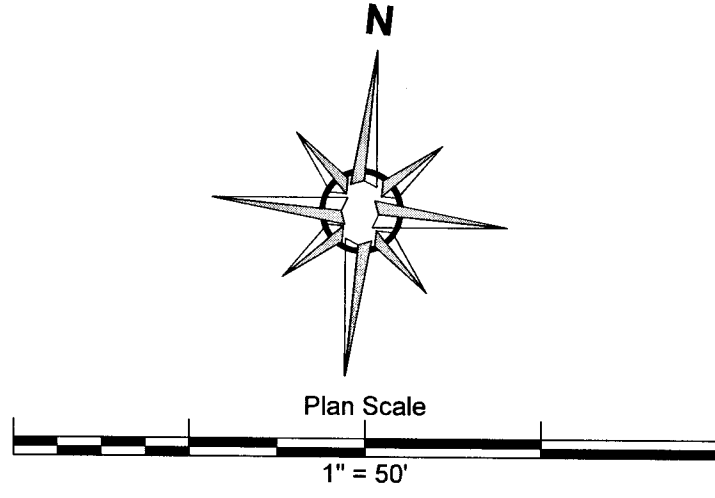


STREET	TIME	NORTHBOUND	SOUTHBOUND	EASTBOUND	WESTBOUND
During Grinding and Paving Construction					
California St. at 24th Ave.	9AM - 4PM (M-F) 8AM - 6PM (S/S) At Other Times	-	-	1@11' 1@11'	1@11' 1@11'
California St. at Other Blocks	9AM - 4PM (M-F) 8AM - 6PM (S/S) At Other Times	-	-	1@12' 1@12'	1@12' 1@12'
25th Ave.	9AM - 4PM (M-F) 8AM - 6PM (S/S) At Other Times	1@12' 1@12'	1@12' 1@12'	Full Roadway	Full Roadway

TRAFFIC CONTROL PLAN
2792J VARIOUS LOCATIONS #37
GRIND & PAVE - CALIFORNIA ST FROM 26TH AVE TO 24TH AVE

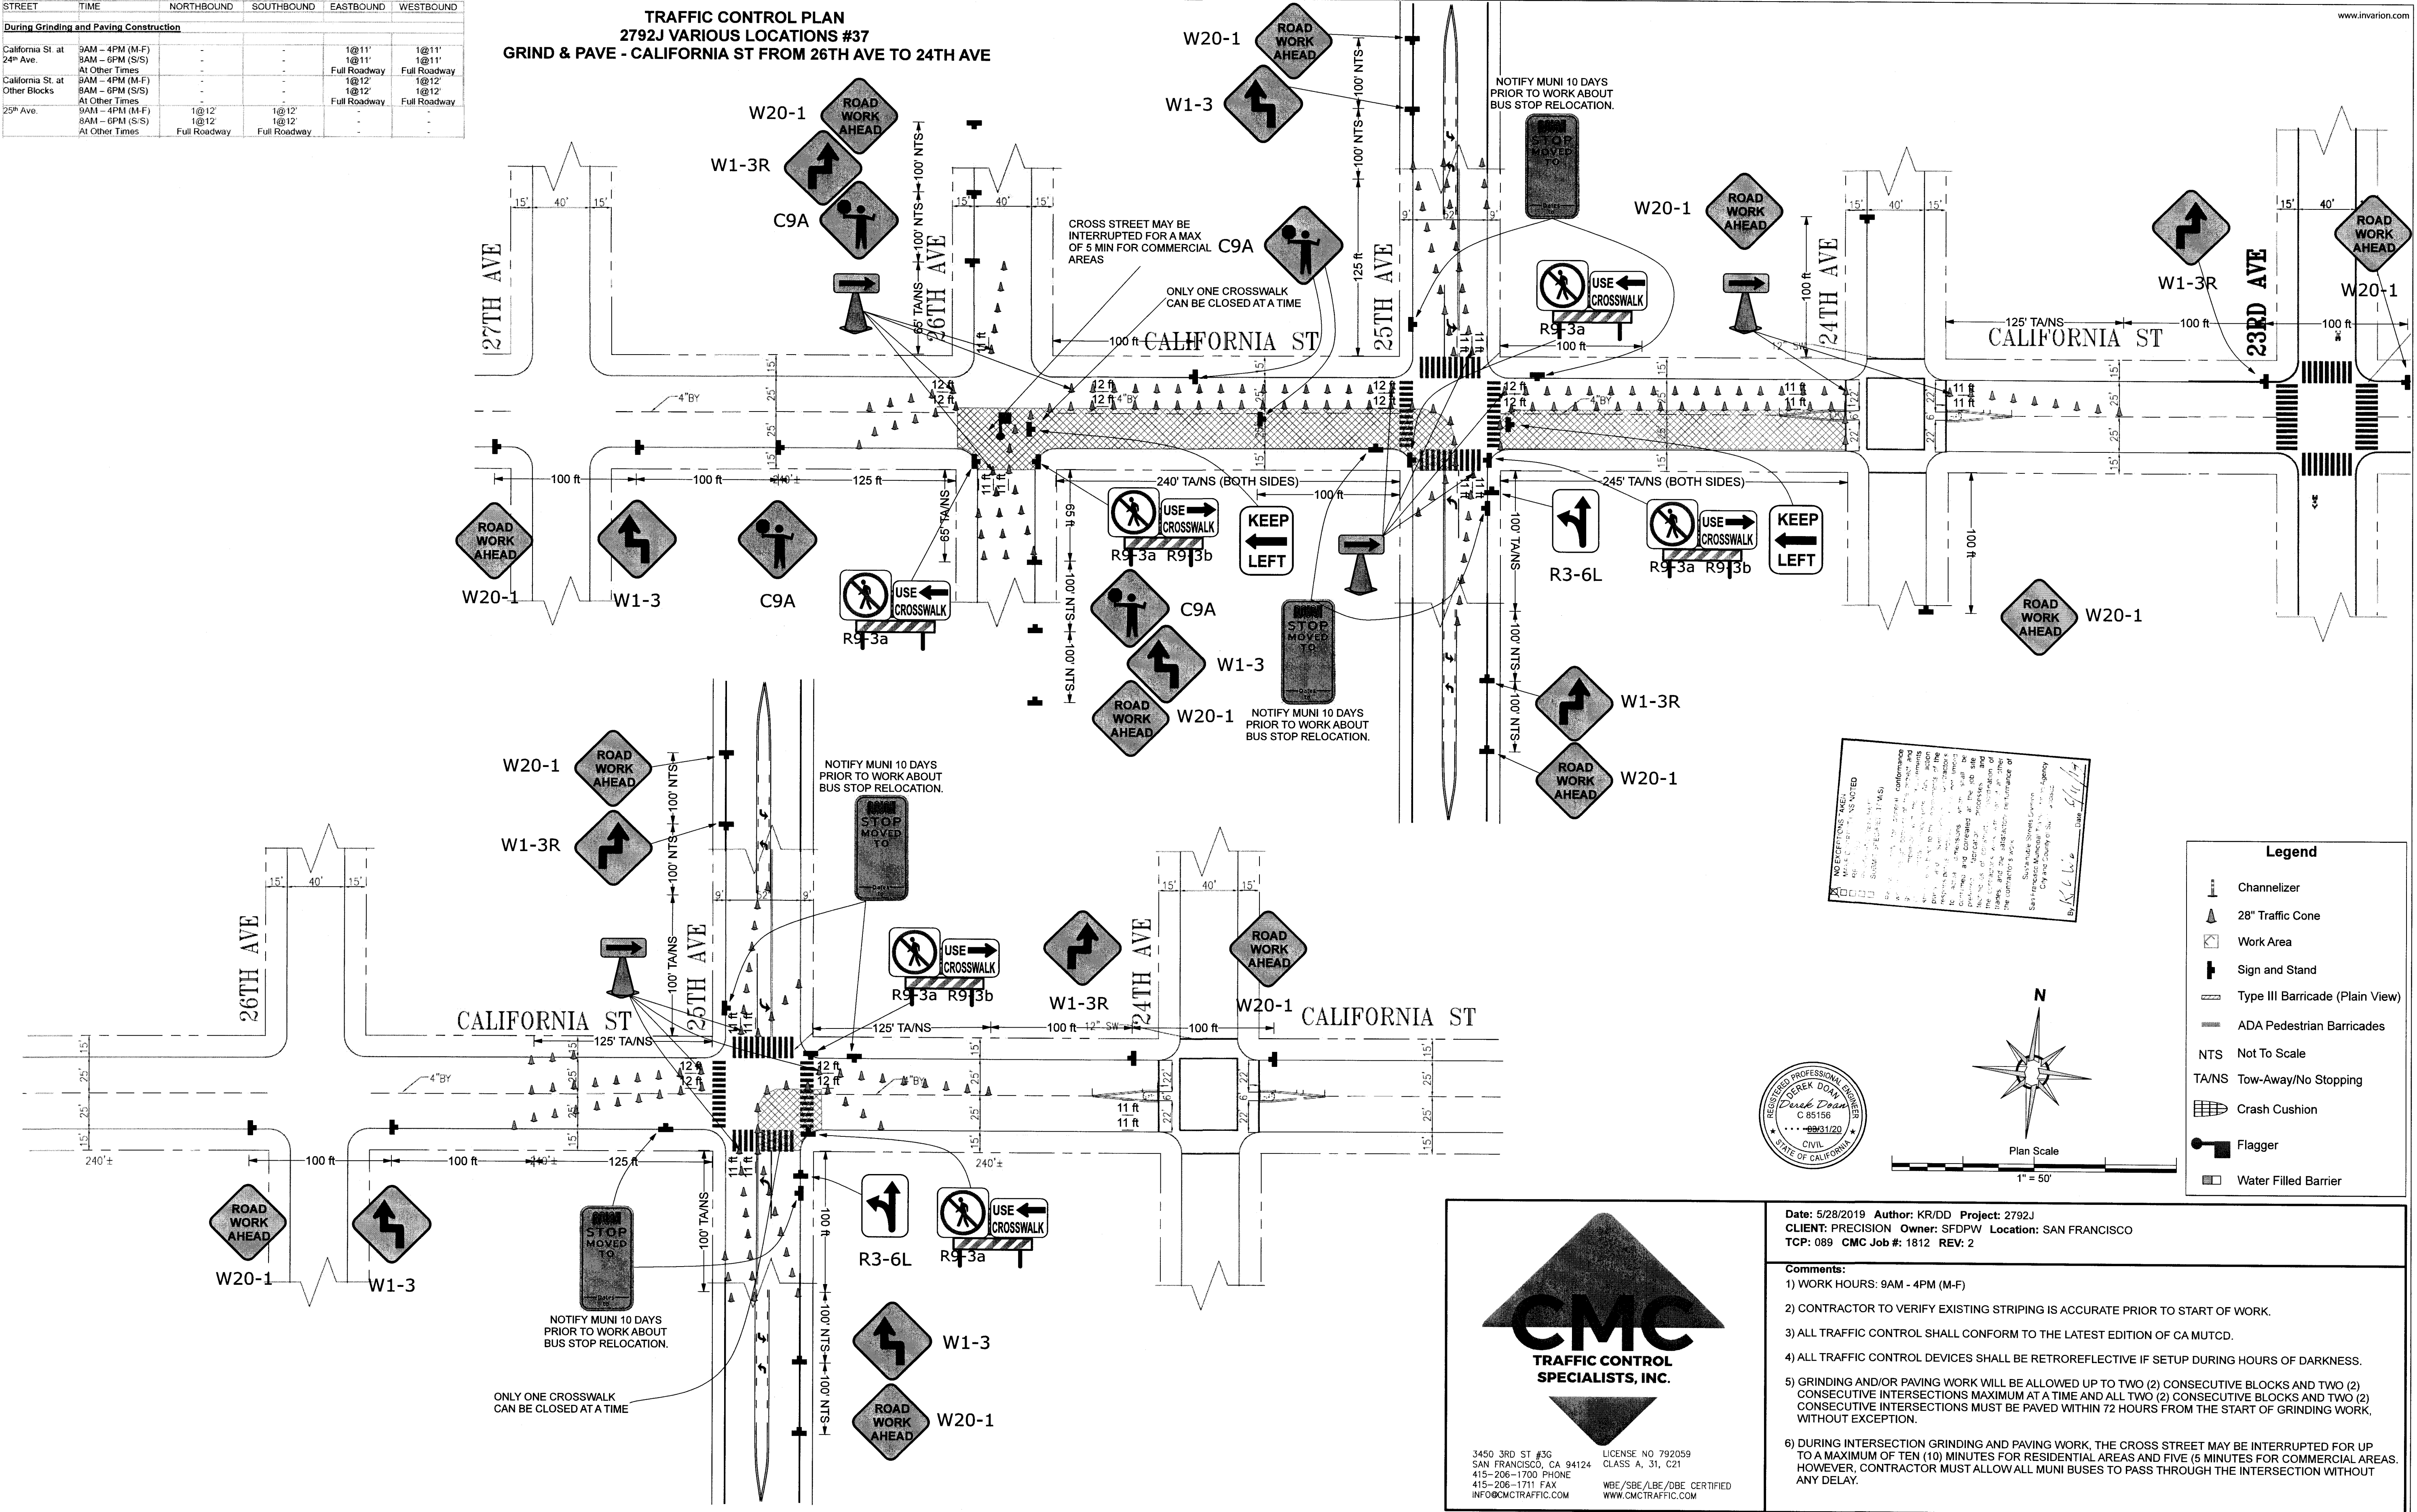

3450 3RD ST #36
SAN FRANCISCO, CA 94124
415-206-1700 PHONE
415-206-1711 FAX
INFO@CMCTRAFFIC.COM

LICENSE NO 792059
CLASS A, 31, C21
WBE/SBE/LBE/DBE CERTIFIED
WWW.CMCTRAFFIC.COM

Date: 5/28/2019 Author: KR/DD Project: 2792J
CLIENT: PRECISION Owner: SFDPW Location: SAN FRANCISCO
TCP: 089 CMC Job #: 1812 REV: 2

- Comments:
- 1) WORK HOURS: 9AM - 4PM (M-F)
 - 2) CONTRACTOR TO VERIFY EXISTING STRIPING IS ACCURATE PRIOR TO START OF WORK.
 - 3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.
 - 4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.
 - 5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK, WITHOUT EXCEPTION.
 - 6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5) MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT ANY DELAY.