




- NOTES:
1. CONTRACTOR SHALL POT-HOLE & DETERMINE (E) INVERT ELEVATION AT THE UPSTREAM END OF THE SEWER AT LEAST (3) WORKING DAYS PRIOR TO ANY WORK ON THIS BLOCK. PROVIDE INFORMATION TO CITY REPRESENTATIVE.
 2. VERIFY NO ACTIVE CONNECTIONS PRIOR TO ABANDONING SEWER FACILITY. NOTIFY CITY REPRESENTATIVE OF ANY DISCREPANCY.
 3. WORK IN THE INTERSECTION OF 16TH STREET AND DE HARO STREET SHALL BE COORDINATED WITH SMTA CONTRACT 1303.

SW 3 = 2 EA
 SW 6 = 382 LF
 SW 21 = 84 LF
 SW 18 = 3 EA
 SW 30 = 3 EA

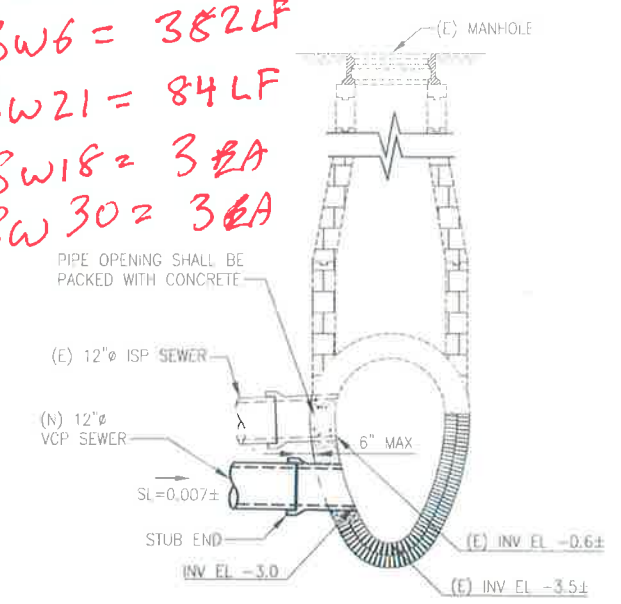


DETAIL NOTE:
 REMOVE BRICKS AS NECESSARY TO ACCOMMODATE (N) SEWER CONNECTION AND FILL ANNULAR SPACE BETWEEN (E) BRICK SEWER & VCP CONNECTION WITH NON-SHRINK GROUT.

MH CONNECTION DETAIL 1

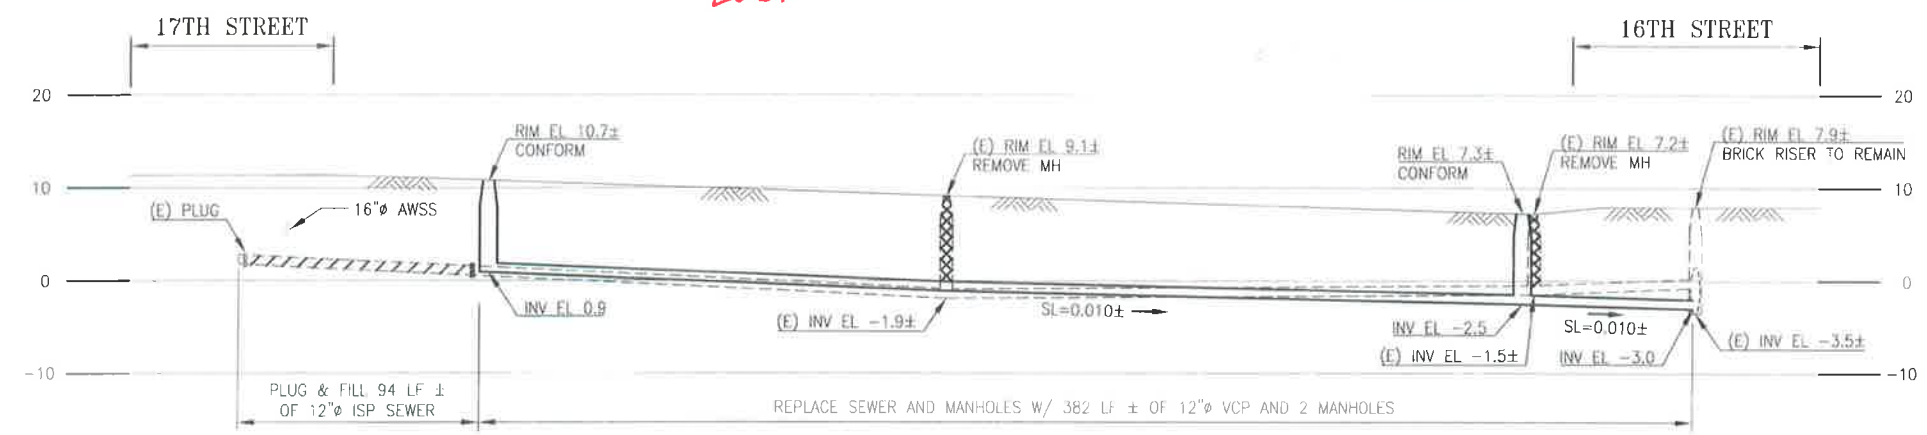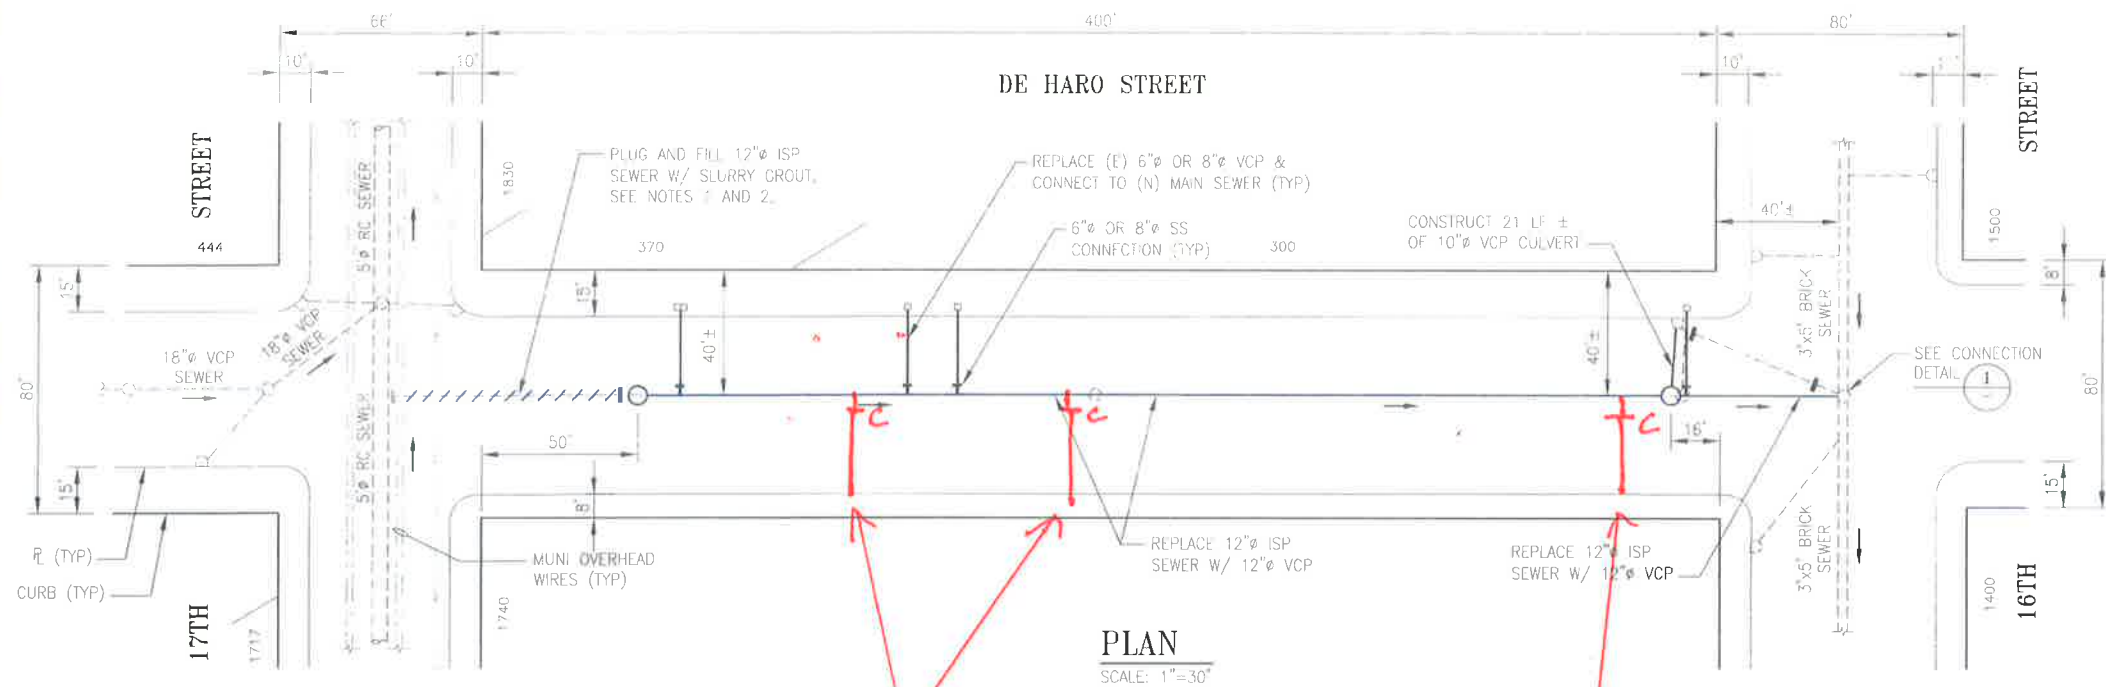

PROFILE
 SCALE: HORIZ 1"=30'
 VERT 1"=10'



SEWER SIZED BY
 Y.W. YW
 APPROVED BY
 B.S. BS

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				

REFERENCE INFORMATION
 & FILE NO. OF SURVEYS
 20176
 50236.4
 54339
 87635



DESIGN & ENGINEERING
 CITY & COUNTY OF SAN FRANCISCO
 SAN FRANCISCO PUBLIC WORKS
 30 VAN NESS AVENUE, 5TH FLOOR
 SAN FRANCISCO, CA 94102 - 6028

Section Mgr: LESLEY WONG
 Deputy Bureau Mgr: IQBAL DHAPA
 Bureau Mgr: PATRICK RIVERA

DESIGNED: J. KUNG 4/25/18
 DRAWN: S. HUEY 4/20/18
 CHECKED: J. HELMUTH 4/20/18



SCALE: AS NOTED
 SHEET OF SHEETS: 55 OF 89

VARIOUS LOCATIONS PAVEMENT
 RENOVATION NO. 37 AND SEWER REPLACEMENT
 DE HARO STREET SEWER REPLACEMENT
 17TH STREET TO 16TH STREET
 PLAN, PROFILE AND DETAIL

CONTRACT NO. 2792J
 DRAWING NO. SW-5
 FILE NO. 109,993
 REV. NO. 0