


TRAFFIC CONTROL PLAN  
2792J VARIOUS LOCATIONS #37  
CISTERN RING REPLACEMENT - KANSAS ST AT 20TH ST

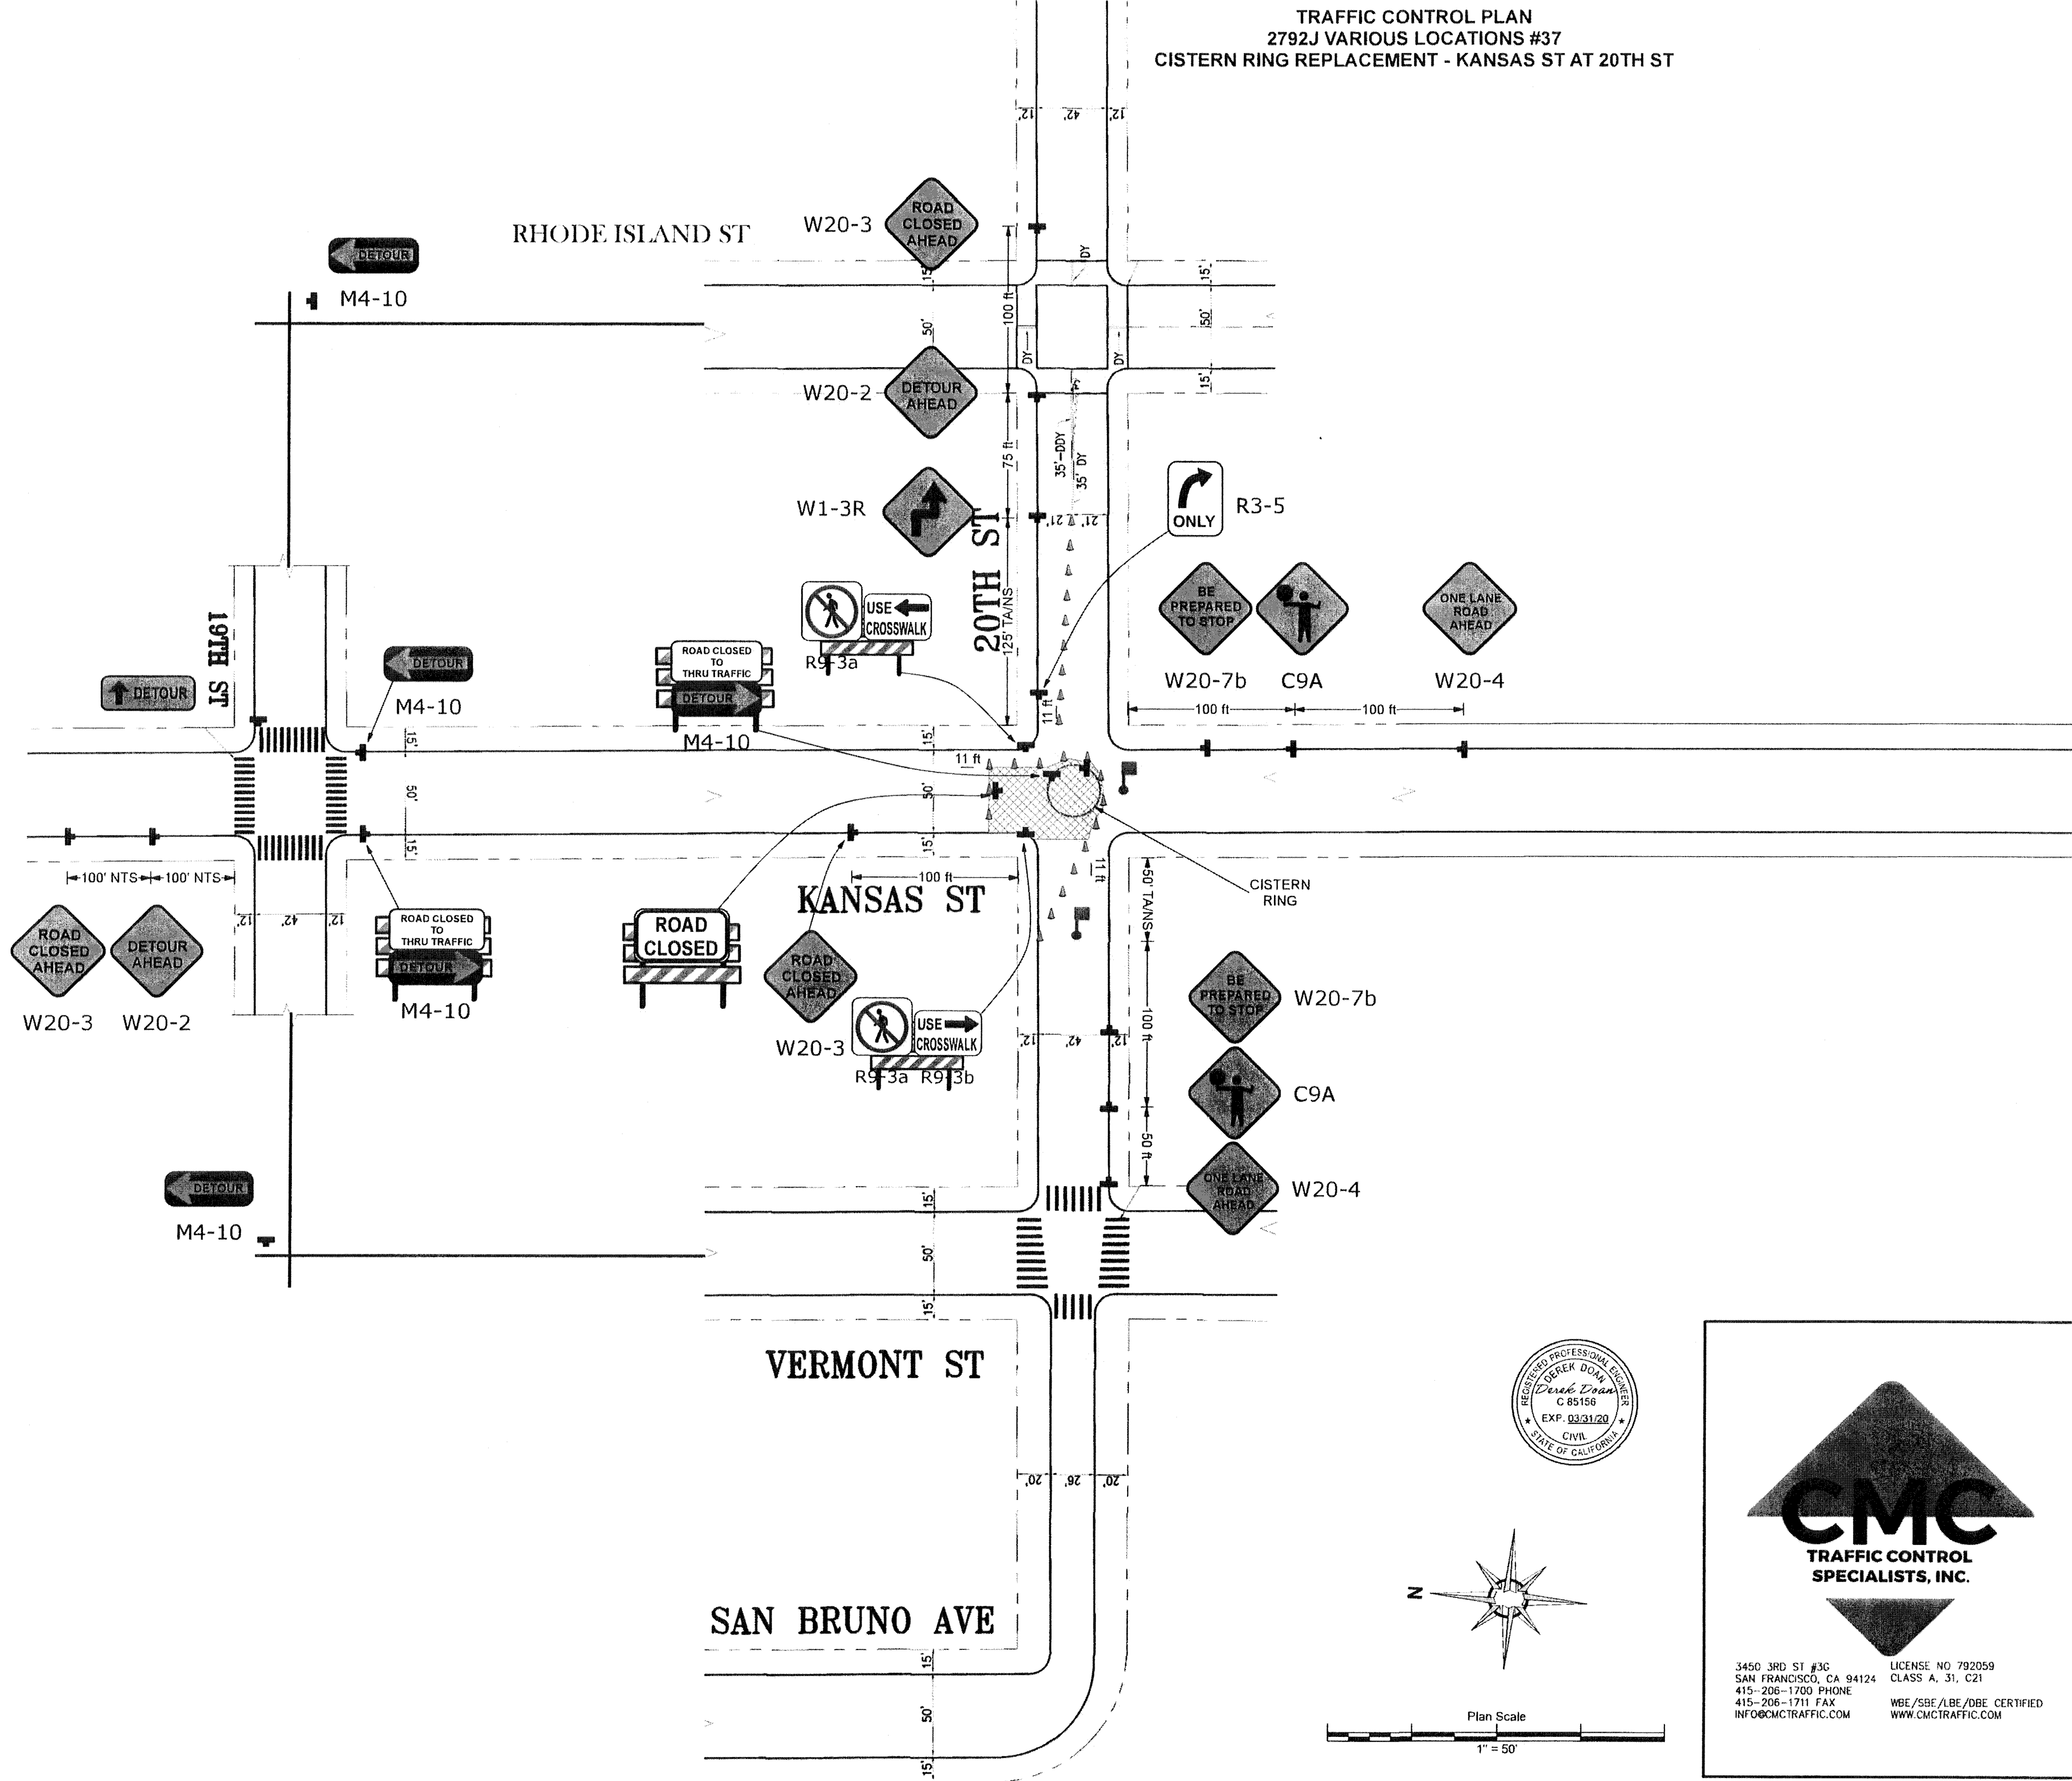


NO EXCEPTIONS  
MADE  
REVISIONS  
SUBMITTALS  
(S)

Reviewed for conformance with the project and shown on the project. Any action shown is subject to the requirements of the plans and specifications. Contractor's responsibility is to confirm and verify the work at the job site. Techniques and processes and the contractor's performance of the contract shall be confirmed and verified at the job site.

Submitted by: *KWW* Date: *6/11/19*

Submitted to: Streets Division  
San Francisco Municipal Transportation Agency  
City and County of San Francisco

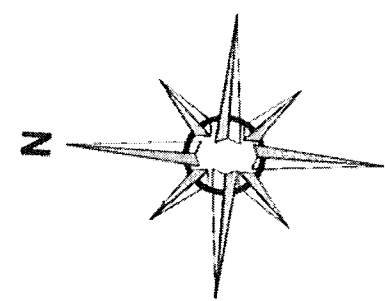

Plan Scale  
1" = 50'



3450 3RD ST #3C  
SAN FRANCISCO, CA 94124  
415-206-1700 PHONE  
415-206-1711 FAX  
INFO@CMCTRAFFIC.COM

LICENSE NO 792059  
CLASS A, 31, C21  
WBE/SBE/LBE/DBE CERTIFIED  
WWW.CMCTRAFFIC.COM

Date: 5/15/2019 Author: KR/DD Project: 2792J  
CLIENT: PRECISION Owner: SFDPW Location: SAN FRANCISCO  
TCP: 129 CMC Job #: 1812 REV: 1

**Comments:**

- 1) WORK HOURS: 8AM - 6PM
- 2) CONTRACTOR TO VERIFY EXISTING STRIPING IS ACCURATE PRIOR TO START OF WORK.
- 3) ALL TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF CA MUTCD.
- 4) ALL TRAFFIC CONTROL DEVICES SHALL BE RETROREFLECTIVE IF SETUP DURING HOURS OF DARKNESS.
- 5) GRINDING AND/OR PAVING WORK WILL BE ALLOWED UP TO TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MAXIMUM AT A TIME AND ALL TWO (2) CONSECUTIVE BLOCKS AND TWO (2) CONSECUTIVE INTERSECTIONS MUST BE PAVED WITHIN 72 HOURS FROM THE START OF GRINDING WORK, WITHOUT EXCEPTION.
- 6) DURING INTERSECTION GRINDING AND PAVING WORK, THE CROSS STREET MAY BE INTERRUPTED FOR UP TO A MAXIMUM OF TEN (10) MINUTES FOR RESIDENTIAL AREAS AND FIVE (5) MINUTES FOR COMMERCIAL AREAS. HOWEVER, CONTRACTOR MUST ALLOW ALL MUNI BUSES TO PASS THROUGH THE INTERSECTION WITHOUT ANY DELAY.
- 7) During cistern ring construction at the intersection of Kansas and 20th Streets, the working hours are between 8AM and 6PM. During these working hours, Contractor may close 20th Street to westbound traffic at Kansas Street and Kansas Street southbound traffic at 20th Street. Contractor shall submit a TCP showing traffic detours when working on this cistern. Contractor shall assign two flagperson to control traffic movements and allowing traffic southbound and northbound to/from Kansas Street south of 20th Street (dead end street). After working hours, full roadway must be provided at the intersection of 20th and Kansas Streets.